

Kubota Generator Engines

KUBOTA 05 SERIES Diesel (13.1-20.2 HP)																		
Model	Cyl	Combust. System	Intake System	Standby				Continuous				Bore	Stroke	Displacement	Length	Width	Height	Dry Weight
				60 Hz 1800 RPM		50 Hz 1500 RPM		60 Hz 1800 RPM		50 Hz 1500 RPM								
				kW	HP	kW	HP	kW	HP	kW	HP							
D1005-E4BG	3	IDI	NA	9.8	13.1	-	-	8.7	11.7	-	-	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	517 (20.4)	392 (15.4)	605 (23.8)	110 (243)
D1105-E4BG	3	IDI	NA	11.5	15.4	9.5	12.7	10.1	13.5	8.4	11.3	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	517 (20.4)	392 (15.4)	605 (23.8)	110 (243)
D1305-E4BG	3	IDI	NA	13.1	17.6	-	-	11.6	15.6	-	-	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	517 (20.4)	394 (15.5)	590 (23.2)	112 (247)
V1505-E4BG	4	IDI	NA	15.1	20.2	12.5	16.8	13.4	18.0	11.1	14.9	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	602 (23.7)	398 (15.7)	607 (23.9)	127 (280)

KUBOTA 03-M SERIES Diesel (24.3-36.3 HP)																		
D1703-M-E3BG	3	IDI	NA	18.1	24.3	15.0	20.1	15.1	20.2	12.8	17.2	87.0 (3.43)	92.4 (3.64)	1.647 (100.5)	574 (22.6)	486 (19.1)	643 (25.3)	170 (375)
V2003-M-E3BG	4	IDI	NA	21.8	29.2	18.1	24.3	18.2	24.4	15.5	20.8	83.0 (3.27)	92.4 (3.64)	1.999 (122.0)	669 (26.3)	486 (19.1)	631 (24.9)	200 (441)
V2203-M-E3BG	4	IDI	NA	24.2	32.5	20.1	27.0	20.2	27.1	17.2	23.1	87.0 (3.43)	92.4 (3.64)	2.197 (134.1)	669 (26.3)	486 (19.1)	631 (24.9)	200 (441)
V2403-M-E3BG	4	IDI	NA	26.5	35.5	22.0	29.5	22.1	29.6	18.8	25.2	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	669 (26.3)	486 (19.1)	683 (26.9)	204 (450)
V2003-M-T-E3BG	4	IDI	T	27.1	36.3	22.5	30.2	24.5	32.8	20.4	27.4	83 (3.27)	92.4 (3.64)	1.999 (122.0)	669 (26.3)	486 (19.1)	673 (26.5)	208 (458)

KUBOTA V3 SERIES Diesel (45.1-70.8 HP)																		
V3300-E2BG	4	IDI	NA	35.3	47.3	28.9	38.8	32.1	43.0	26.3	35.3	98.0 (3.86)	110 (4.33)	3.318 (202.48)	738 (29.1)	536 (21.1)	746 (29.4)	264 (582)
V3300-E3BG	4	IDI	NA	33.6	45.1	27.5	36.9	30.6	41.0	25.0	33.5	98.0 (3.86)	110 (4.33)	3.318 (202.48)	738 (29.1)	536 (21.1)	746 (29.4)	264 (582)
V3300-T-E2BG	4	IDI	NA	43.1	57.8	35.3	47.3	39.2	52.6	32.1	43.0	98.0 (3.86)	110 (4.33)	3.318 (202.48)	738 (29.1)	538 (21.2)	798 (31.4)	273 (602)
V3600-T-E3BG	4	IDI	T	43.1	57.8	-	-	39.2	52.6	-	-	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	738 (29.1)	538 (21.2)	798 (31.4)	284 (626)
V3800-DI-T-E2BG	4	DI	T	49.5	66.4	42.7	57.2	44.9	60.2	38.8	52.0	100.0 (3.94)	120.0 (4.72)	3.769 (230.0)	738 (29.1)	544 (21.4)	795 (31.3)	290 (639)

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Dry Weight: According to Kubota's standard engine specifications.

Conversion Formula: HP = 0.7457 kW

Output: SAE J1349 and SAE #5 housing


Output: SAE J1349

LxWxH: Excludes cooling fan, with SAE #7 1/2 flywheel and SAE #4 housing

Output: SAE J1349

LxWxH: Excludes cooling fan, with SAE #11 1/2 flywheel and SAE #3 housing

How To Read Your Engine Model

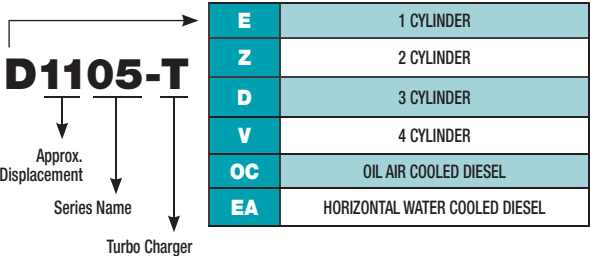


Kubota offers diesel engines with output up to 98 HP.

Kubota Engine Selection Guide

LATIN AMERICAN MARKET

Kubota

Kubota Engine America Corp.
505 Schelter Road
Lincolnshire, IL 60069
United States
P: +1-847-955-2500
www.kubotaengine.com

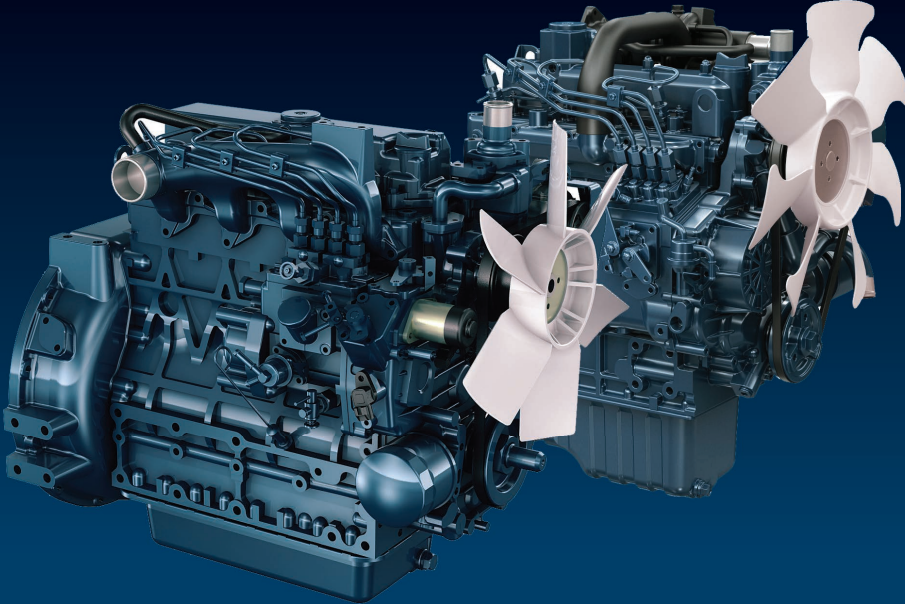

Kubota

Kubota Industrial Engines

KUBOTA HORIZONTAL Diesel (7 HP)																		
Model	Cyl	Combust. System	Intake System	Rated Speed	INDUSTRIAL USE						Bore	Stroke	Displacement	Length	Width	Height	Dry Weight	
					Gross Intermittent			Net Intermittent		Net Continuous								
					rpm	kW	HP	kW	HP	kW								HP
EA330-E4	1	IDI	NA	3000	-	-	5.2	7.0	4.4	5.9	77.0 (3.03)	70.0 (2.76)	0.325 (19.83)	567 (22.3)	410 (16.2)	457 (18.0)	54.0 (119.0)	

KUBOTA OIL AIR-COOLED Diesel (6-9.4 HP)																	
OC60-E4	1	IDI	NA	3600	-	-	4.5	6.0	4.1	5.5	72.0 (2.83)	68.0 (2.68)	0.276 (16.84)	403 (15.9)	461 (18.1)	458 (18.0)	38.0 (84.0)
OC95-E4	1	IDI	NA	3600	-	-	7.0	9.4	6.25	8.4	83.0 (3.27)	77.0 (3.03)	0.416 (25.39)	452 (17.8)	503 (19.8)	501 (19.7)	56.0 (123.0)

KUBOTA SUPER MINI SERIES Diesel (10.6-23.5 HP)																	
Model	Cyl	Combust. System	Intake System	Rated Speed	INDUSTRIAL USE						Bore	Stroke	Displacement	Length	Width	Height	Dry Weight
					Gross Intermittent		Net Intermittent		Net Continuous								
				rpm	kW	HP	kW	HP	kW	HP	mm(in)	L(cu.in)	mm(in)	mm(in)	kg(lb)		
Z482-E3B	2	IDI	NA	3000	8.3	11.1	7.9	10.6	6.9	9.3	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	337 (13.3)	386 (15.2)	564 (22.2)	53 (117)
Z482-E4B	2	IDI	NA	3600	9.9	13.3	9.3	12.5	8.1	10.9	67.0 (2.64)	68.0 (2.68)	0.479 (29.23)	337 (13.3)	386 (15.2)	564 (22.2)	53 (117)
Z602-E4B	2	IDI	NA	3600	12.5	16.8	11.6	15.6	10.1	13.5	72.0 (2.83)	73.6 (2.90)	0.599 (36.55)	351 (13.8)	401 (15.8)	544 (21.4)	57 (126)
D722-E3B	2	IDI	NA	3000	12.4	16.6	11.8	15.8	10.2	13.7	67.0 (2.64)	68.0 (2.68)	0.719 (43.88)	407 (16.0)	386 (15.2)	564 (22.2)	63 (139)
D722-E4B	3	IDI	NA	3600	14.9	20.0	14.0	18.8	12.2	16.4	67.0 (2.64)	68.0 (2.68)	0.719 (43.88)	407 (16.0)	386 (15.2)	564 (22.2)	63 (139)
D902-E4B	3	IDI	NA	3600	18.5	24.8	17.5	23.5	15.2	20.4	72.0 (2.83)	73.6 (2.90)	0.898 (54.80)	434 (17.1)	401 (15.8)	544 (21.4)	72 (159)

KUBOTA 05 SERIES Diesel (22.5-42 HP)																	
D1005-E4B	3	IDI	NA	3000	17.5	23.5	16.8	22.5	14.6	19.6	76.0 (2.99)	73.6 (2.90)	1.001 (61.08)	481 (19.0)	396 (15.6)	605 (23.8)	93 (205)
D1105-E4B	3	IDI	NA	3000	18.5	24.8	17.8	23.9	15.5	20.8	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	481 (19.0)	396 (15.6)	605 (23.8)	93 (205)
D1305-E3B	3	IDI	NA	3000	21.7	29.1	21.0	28.2	18.2	24.4	78.0 (3.07)	88.0 (3.46)	1.261 (76.95)	481 (19.0)	396 (15.6)	590 (23.2)	95 (209)
D1105-T-E3B	3	IDI	T	3000	24.5	32.9	23.5	31.5	20.4	27.4	78.0 (3.07)	78.4 (3.09)	1.123 (68.53)	481 (19.0)	432 (17.0)	629 (24.8)	97 (214)
V1505-E3B	4	IDI	NA	3000	26.2	35.1	25.0	33.5	21.7	29.1	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	566 (22.3)	396 (15.6)	607 (23.9)	110 (243)
V1505-T-E3B	4	IDI	T	3000	33.0	44.3	31.3	42.0	27.2	36.5	78.0 (3.07)	78.4 (3.09)	1.498 (91.41)	566 (22.3)	432 (17.0)	621 (24.4)	114 (251)

KUBOTA 03-M SERIES Diesel (43.7-59 Gross HP)																	
Model	Cyl	Combust. System	Intake System	Rated Speed	INDUSTRIAL USE						Bore	Stroke	Displacement	Length	Width	Height	Dry Weight
					Gross Intermittent		Net Intermittent		Net Continuous								
				rpm	kW	HP	kW	HP	kW	HP	HP	mm(in)	L(cu.in)	mm(in)		kg(lb)	
V2003-M-E3B	4	IDI	NA	2800	32.6	43.7	29.8	40.0	25.9	34.7	83.0 (3.27)	92.4 (3.64)	1.999 (122.0)	642 (25.3)	495 (19.5)	678 (26.7)	180 (397)
V2203-M-E3B	4	IDI	NA	2800	35.9	48.1	33.0	44.3	28.7	38.5	87.0 (3.43)	92.4 (3.64)	2.197 (134.1)	642 (25.3)	495 (19.5)	678 (26.7)	180 (397)
V2403-M-E3B	4	IDI	NA	2700	36.5	48.9	33.9	45.5	29.4	39.4	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	646 (25.4)	495 (19.5)	683 (26.9)	184 (406)
V2403-M-DI-E3B	4	DI	NA	2700	36.5	48.9	35.0	46.9	30.4	40.8	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	646 (25.4)	495 (19.5)	683 (26.9)	184 (406)
V2403-M-T-E3B	4	IDI	T	2700	44.0	59.0	41.3	55.4	35.8	48.0	87.0 (3.43)	102.4 (4.03)	2.434 (148.5)	646 (25.4)	495 (19.5)	722 (28.4)	201 (443)

KUBOTA V3 SERIES Diesel (66.8-97.6 Gross HP)																	
V3600-E3B	4	IDI	NA	2600	49.8	66.8	45.7	61.3	39.7	53.2	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	699 (27.5)	567 (22.3)	742 (29.2)	252 (556)
V3600-T-E3B	4	IDI	T	2400	55.4	74.3	-	-	-	-	98.0 (3.86)	120.0 (4.72)	3.620 (220.9)	699 (27.5)	567 (22.3)	794 (31.2)	261 (575)
V3300-DI-T-E2B	4	DI	T	2600	66.8	89.5	-	-	-	-	98.0 (3.86)	110.0 (4.33)	3.620 (220.9)	699 (27.5)	538 (21.2)	792 (31.2)	255 (562)
V3800-DI-T-E2B	4	DI	T	2600	72.8	97.6	-	-	-	-	100.0 (39.94)	120.0 (4.72)	3.620 (220.9)	699 (27.5)	567 (22.3)	791 (31.1)	267 (589)

